

Certificate of Analysis

ISO 17034

Reference Material

Product name

Glycine

Product code

MM1509.00-0250

CAS number

56-40-6

Molecular weight

75.07

Molecular formula

C₂H₅NO₂

Lot number

G977008

Appearance


white solid

Melting point

> 225 °C (dec.)

Long-term storage

2 to 8 °C, dark



Assay¹ "as is"
99.8 %

Uncertainty² U
0.5 %

Intended Use: Use for identification and quantification. The assay is verified by a second testing method. Due to the homogeneity studies, the minimum amount of sample to be used is 12 mg.

Date of shipment:

06 Apr 2020

Producer confirms that this reference material (RM) meets the specification detailed on this Certificate of Analysis for **one year** from the date of shipment, provided the substance is stored under the recommended conditions unopened in the original container.

Release by:	Date of Release:		Product Release
Dr. Sabine Schröder	Luckenwalde, 23 Mar 2020		

¹ Calibration and verification were carried out using standards traceable to SI-units. The value is expressed on an "as is" basis.

² The uncertainty "U" is the expanded uncertainty of the testing method for the assigned value estimated in accordance with the Guide to the Expression of Uncertainty in Measurement (GUM). It corresponds to a level of confidence of about 95%. Coverage factor k = 2.



Important product information

This RM is intended for laboratory use only and is not suitable for human or animal consumption.

This RM conforms to the characteristics of a primary standard as described in the ICH Guidelines. The values quoted in this Certificate of Analysis are the producer's best estimate of the true values within the stated uncertainties and based on the techniques described in this Certificate of Analysis. The production of this RM was undertaken in accordance with the requirements of ISO 17034. The identity is verified by data from international scientific literature.

Storage and handling

Before usage of the RM, it should be allowed to warm to room temperature. No drying is required, as assigned values are already corrected for the content of water and other volatile materials.

Further content

- Assigned value
- Purity
- Identity
- Stability and homogeneity
- Revision table

SPECIMEN



Assigned value

Assay "as is": **99.77 %; U = 0.45 %**


The assay "as is" is assessed by quantitative NMR spectroscopy and is equivalent to the assay based on the not-anhydrous and not-dried substance. The assay is verified by 100% method (mass balance).

The verified result lies inside our acceptance criteria, i.e. less than 1.0 % difference to assay assigning technique.

For quantitative applications, use the assay as a calculation value on the "as is basis". The uncertainty of the assay can be used for estimation/calculation of measurement uncertainty.

Method 1: Value assigning technique - quantitative NMR spectroscopy	
Conditions	400 MHz, D ₂ O
Internal Standard	Potassium hydrogen phthalate (certified reference material), signal 7.1 - 8.1 ppm, 4 H
Result (mass fraction, n = 6)	99.77 %; U = 0.45 %

Quantitative NMR spectrum

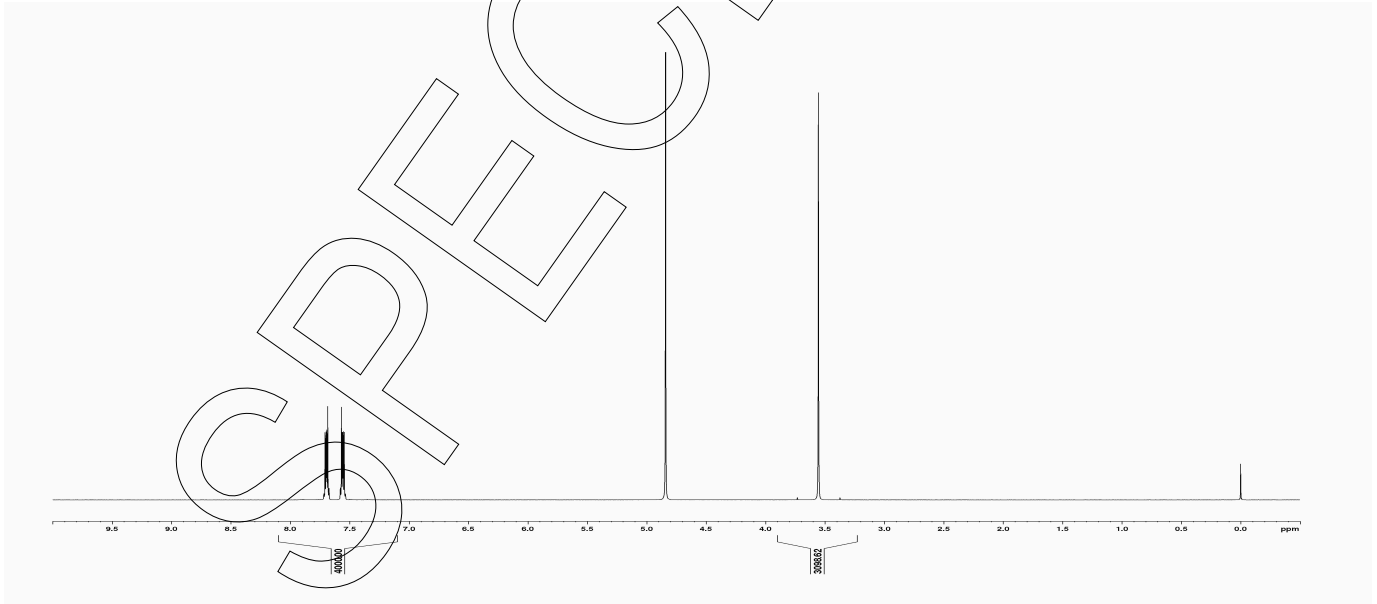



Method 2: Value verifying technique - 100% method

100% method (mass balance) with chromatographic purity by HPLC

Result

100.00 %

The calculation of the 100% method follows the formula:

$$\text{Assay (\%)} = (100\% - \text{volatile contents (\%)}) * \frac{\text{Purity (\%)}}{100\%}$$

Volatile contents are considered as absolute contributions and purity is considered as relative contribution. Inorganic residues are excluded by additional tests.

SPECIMEN




Purity

Purity by high performance liquid chromatography (HPLC)

HPLC Conditions:	
Column	Luna C18(2): 5 μ m, 250 x 4.6 mm
Column temperature	25 °C
Detector	DAD, 191 nm
Injector	Auto 6 μ l, 2.0132 mg/ml in 1.4 g/l C ₅ H ₁₁ NaO ₃ S, pH 2.2 + 0.3 % H ₃ PO ₄
Flow rate	1.0 ml/min
Phase A	1.4 g/l Sodium pentanesulfonate, pH 2.2
Phase B	
Gradient program	0-15 min A/B 100/0 (v/v)

HPLC chromatogram and peak table

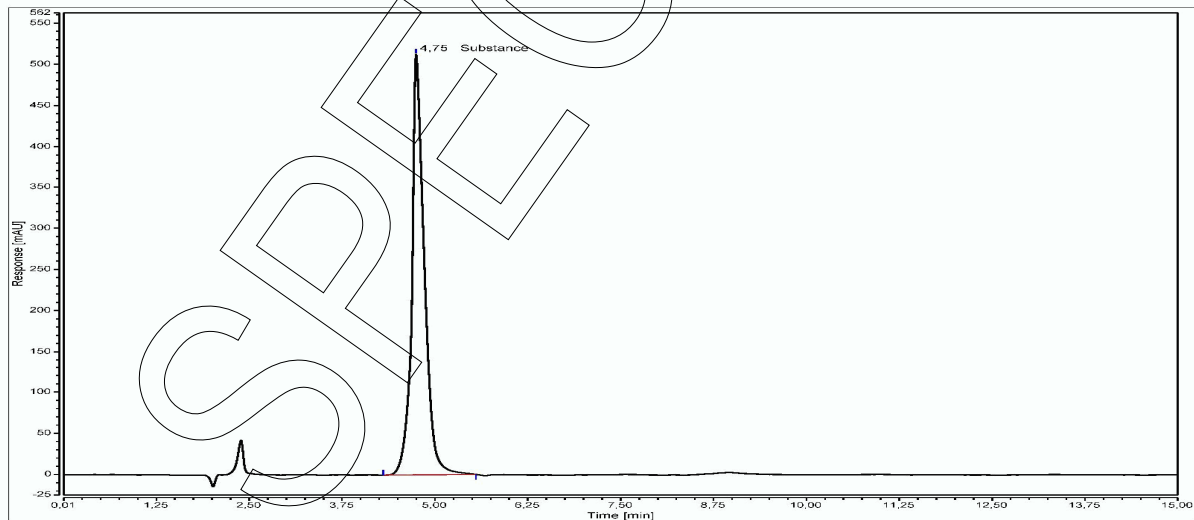



Area percent report - sorted by signal

Pk #	Retention time	Area	Area %
1	4.746	99.4359	100.00
Totals		99.4359	100.00

The content of the analyte was determined as ratio of the peak area of the analyte and the cumulative areas of the purities, added up to 100 %. System peaks were ignored in calculation.

Result (n = 6) 100.00 %; U = 0.18 %

Volatile content

Water content

Method Karl Fischer titration
Result (n = 3) No significant amounts of water were detected (< 0.05 %).*

*not accredited testing method

Residual solvents

Method ¹H-NMR
Result (n = 1) No significant amounts of residual solvents were detected (< 0.05 %).*

*not accredited testing method

Inorganic residues

Method: Sulphated ash*, EP 8.2 chapter 2.4.14

According to the available data, the presence of inorganic impurities in the reference material other than those detectable by sulphated ash is highly unlikely. Inorganic residues can be excluded by results of the sulphated ash. Therefore, no assay correction was performed for inorganic impurities.


*not accredited testing method



Identity


The identity is assessed by ISO/IEC 17025 accredited testing methods.

Method	Conditions	Result
¹ H-NMR	400 MHz, D ₂ O	Structure confirmed






Method	Conditions	Result
¹³ C-NMR	100 MHz, D ₂ O	Structure confirmed

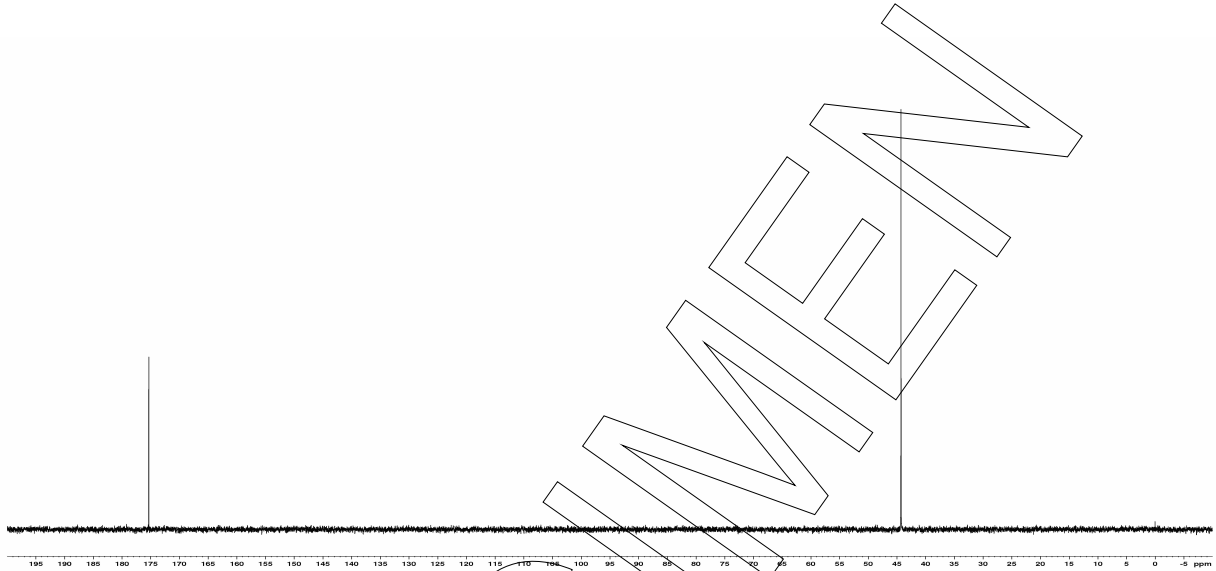




Method	Conditions	Result
MS	3.5 kV ESI+; capillary temperature: 269 °C Theoretical value: 76.03930	Structure confirmed

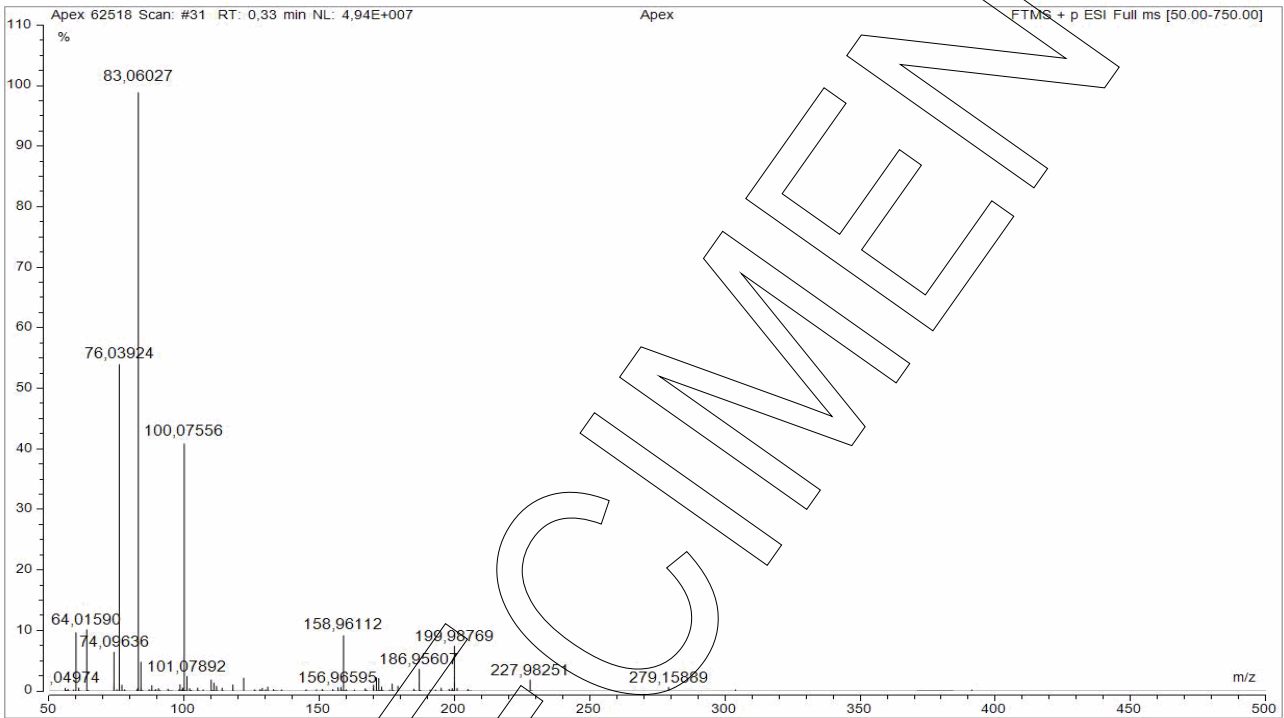

SPECIMEN



Method	Conditions	Result
IR	Attenuated Total Reflection Fourier Transform Infrared (ATR-FTIR) Spectroscopy	Structure confirmed

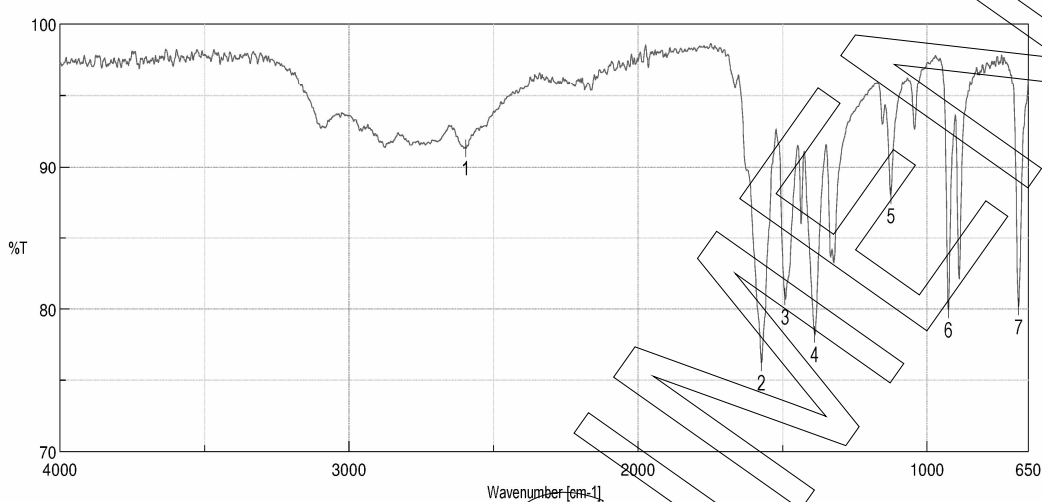

No.	Position	Intensity
1	2595.72	91.2701
2	1573.63	76.2139
3	1492.63	80.8598
4	1388.5	78.162
5	1126.22	87.9507
6	926.628	79.9293
7	683.642	80.142

Stability and Homogeneity

Accelerated stability studies indicate no significant instability. The given validity period is based on this data. This is backed up by additional stability testing and historical data over the range of several years.

RM quality is controlled by regularly performed quality control tests (re tests). Homogeneity assured by qualified process of preparation and verified by homogeneity testing.

Revision table

Revision	Date	Reason for revision
00	23 Mar 2020	Release of the Certificate of Analysis - initial version

Product warranties for the RM are set out in the terms and conditions of purchase.