

Certificate of Analysis

Characterisation methods are accredited according to

ISO 17025

Reference Material

Product name

4,5a-Epoxy-14-hydroxy-17-(prop-2-enyl)-3-(prop-2-enyloxy) morphinan-6-one (3-O-Allylnaloxone)

Product code
MM0272.10-0025

CAS number
Appearance
1352085-46-1
Molecular weight
Act number
W989997

Appearance
off-white solid
Melting point

367.44 66 °C

HO

Assay¹ "as is" 100.2 % Uncertainty² U **0.3** %

Intended Use: Use for identification and quantification. The assay is verified by a second testing method.

Date of shipment:

02/Sep 2019

Producer confirms that this reference material (RM) meets the specification detailed on this Certificate of Analysis for **one year** from the date of shipment, provided the substance is stored under the recommended conditions unopened in the original container.

Release by: Date of Release:	0	
Dr. Sabine Schröder Luckenwalde, 30 Jul 2019	Toia	Product Release

¹ Calibration and verification were carried out using standards traceable to SI-units. The value is expressed on an "as is" basis.

² The uncertainty "U" is the expanded uncertainty of the testing method for the assigned value estimated in accordance with the Guide to the Expression of Uncertainty in Measurement (GUM). It corresponds to a level of confidence of about 95%. Coverage factor k = 2.



Product information


This RM is intended for laboratory use only and is not suitable for human or animal consumption.

This RM conforms to the characteristics of a primary standard as described in the ICH Guidelines. The values quoted in this Certificate of Analysis are the producer's best estimate of the true values within the stated uncertainties and based on the techniques described in this Certificate of Analysis. The characterisation of this material was undertaken in accordance with the requirements of ISO/IEC 17025. The identity is verified by data from international scientific literature.

Storage and handling

Before usage of the RM, it should be allowed to warm to room temperature. No drying is required, as assigned values are already corrected for the content of water and other volatile materials.

Reference Material quality is controlled by regularly performed quality control tests (retests).

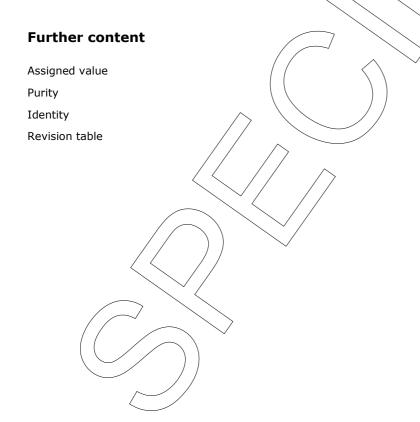



Assigned value

Assay "as is": 100.16 %; U = 0.34 %

The assay "as is" is assessed by carbon titration of elemental analysis and is equivalent to the assay based on the not-anhydrous and not-dried substance. The assay is verified by 100% method (mass balance).

The verified result lies inside our acceptance criteria, i.e. less than 1.0 % difference to assay assigning technique.

For quantitative applications, use the assay as a calculation value on the "as is basis". The uncertainty of the assay can be used for estimation/calculation of measurement uncertainty.

Method 1: Value assigning technique - carbon titration of elemental analysis

Method

percentage carbon found in relation to percentage carbon as calculated for molecular formula

Results (mass fraction, n = 3)

100,16%; U = 0.34%

Method 2: Value verifying technique - 100% method

100% method (mass balance) with chromatographic purity by HPLC

Result

99.83 %

The calculation of the 100% method follows the formula:

Assay (%) = (100 % - volatile contents (%))

Purity (%)

Volatile contents are considered as absolute contributions and purity is considered as relative contribution. Inorganic residues are excluded by additional tests.

LGC GmbH, Louis-Pasteur-Str. 30, D-14943 Luckenwalde, Germany

MM0272.10-0025 Lot number W989997




Purity

Purity by High Performance Liquid Chromatography (HPLC)

HPLC Conditions:	
Column	Cortecs UPLC C18 + 1.6 µm, 75 x 2.1 mm
Column temperature	40 °C
Detector	DAD, 210 nm
Injector	Auto 1 µl; 0.314 mg/ml in Acetonitrile/Water 50/50 (v/v)
Flow rate	0.5 ml/min
Phase A	Water, 0.1 % HCOOH
Phase B	Acetonitrile, 0.1 % HCOOH
Gradient program	0-1 min A/B 98/2
	1-11 min A/B to 2/98
	11-13 min A/B 2/98
	13-15 min A/B to 98/2
	15-20 min A/B 98/2 (v/v)



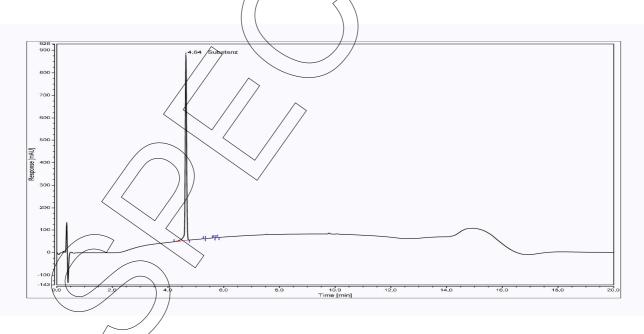



Area percent report - sorted by signal			
Pk #	Retention time	Area	Area %
1	4.639	49.6352	99.84
2	5.339	0.0069	0.01
3	5.646	0.0243	0,05
4	5.779	0.0462	0.09
Totals		49.7126	100.00

The content of the analyte was determined as ratio of the peak area of the analyte and the cumulative areas of the purities, added up to 100 %. System peaks were ignored in calculation.

Volatile content

Water content

Method

Result

No significant amounts of water were detected (< 0.05 %).*

*not accredited testing method

Result

No significant amounts of residual solvents

Method

Result (n = 1)

No significant amounts of residual solvents were detected (< 0.05 %).*

*not accredited testing method

Inorganic residues

Method: Elementary analysis


Inorganic residues can be excluded by elementary analysis (CHN).

LGC GmbH, Louis-Pasteur-Str. 30, D-14943 Luckenwalde, Germany




Identity


The identity is assessed by ISO/IEC 17025 accredited testing methods.

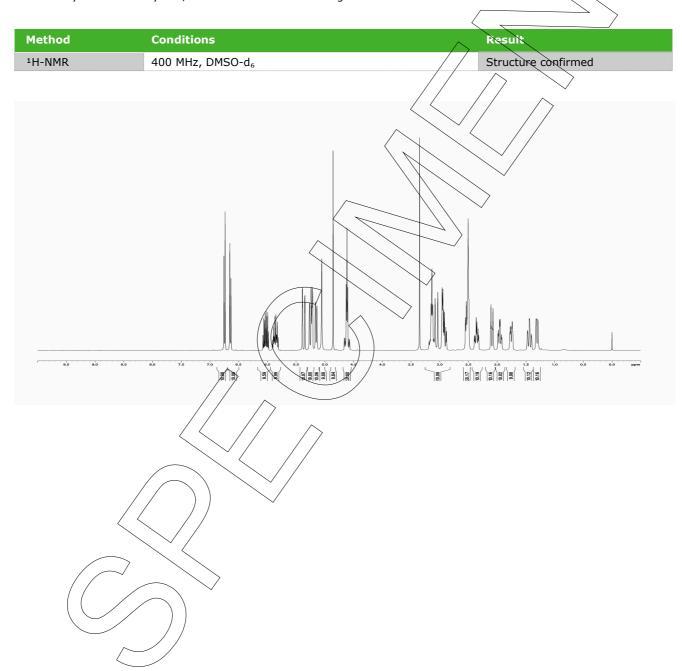



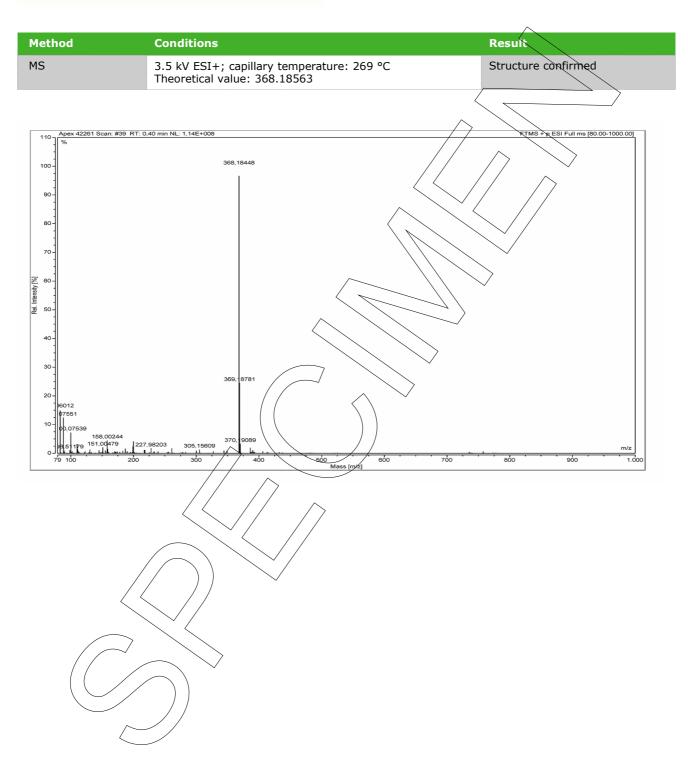



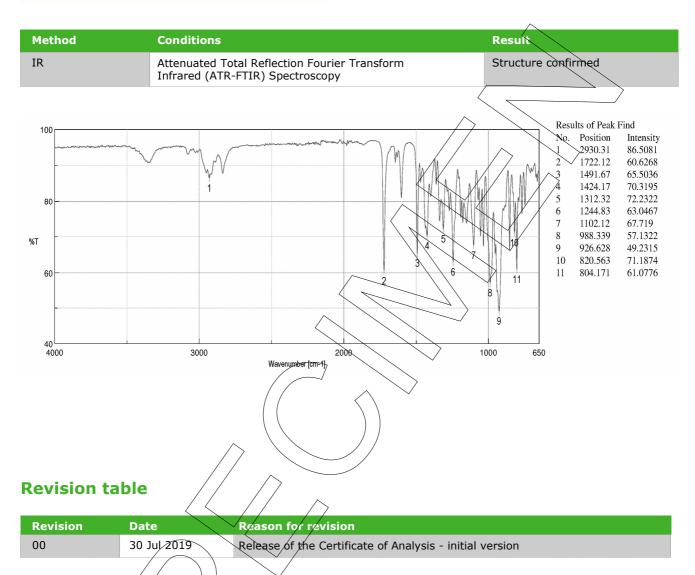

Product warranties for the RM are set out in the terms and conditions of purchase.