


**REFERENCE MATERIAL CERTIFICATE**

Reference Material

This certificate is designed in accordance with ISO Guide 31. This reference material (RM) was designed, produced and verified in accordance with a registered quality management system ISO 9001. All measurements were performed according to ISO/IEC 17025 by a DAkkS accredited laboratory (D-PL-19883-01-00).

Product Name  
Disulfoton 100 µg/mL in

Product Code	Lot Number
DRE-XA12980000CY	1010260CY
CAS No.	Format
298-04-4	Solution
Mol. Weight	Expiry Date
274,40	17 Apr 2024
Mol. Formula	Storage Temp
C <sub>8</sub> H <sub>19</sub> O <sub>2</sub> PS <sub>3</sub>	20°C ± 4°C

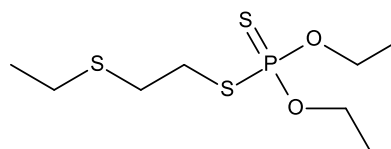

<b>CERTIFIED</b> Concentration 100.0 µg/mL	<b>CERTIFIED</b> Expanded Uncertainty (U) 2.0 µg/mL
--	---

Uncertainty  
The certified value(s) and uncertainty(ies) are determined in accordance with EURACHEM/CITAC Guide for "Quantifying Uncertainty in Analytical Measurement, 3rd edition", with an 95% confidence level (k=2). Uncertainty is based on the Total Combined Uncertainty, including uncertainties of ~~characterisation and stability testing~~ Stability.

The producer certifies that this reference material meets the specification stated in this certificate until the expiry date, provided it is stored unopened at the recommended temperature herein. Product warranties for this reference material are set out in the terms and conditions of purchase.

CERTIFIED BY		CERTIFIED ON			RM Release
Dr. K. Wörmann	17 Apr 2019				

REFERENCE MATERIAL CERTIFICATE

CHROMATOGRAM

No chromatogram available.

Instrument

HPLC/DAD

Detection

DAD

Column

ReproSil 100 C18 5 µm 250 x 3 mm

Method Details

Acetonitrile:Water

9:1

Inj.-Vol.

10 µL

Flow

1 mL/min

Method of Preparation

The certified value is based on gravimetric and volumetric preparation of this RM. This RM has been confirmed by the appropriate analytical techniques.

Batch Information

Solvent: Cyclohexane, Lot No. I097621710, 50.00 mL.

Gravimetric Data

Compound Name	Lot No.	Weight (mg)	Purity (%)
Disulfoton	139572	5,083	98,4

Intended Use

This RM is intended for use in a laboratory as a calibration and quality control standard or in method development for analytical techniques.

the balances is verified daily internally and annually by an external accredited calibration service. Chromatographic methods are traceable to the International System of Units (SI).

Instructions for use

The RM should be used shortly after opening to avoid concentration changes due to evaporation. It is recommended to use 1 mL as the minimum sample size and if less material is used, to increase the certified uncertainty by a factor of two for half sample and four for a quarter of sample. If storage after opening is necessary, the RM should be tightly closed and kept from light and moisture. If the RM was in a sealed ampoule, it should be transferred to a vial with minimum head space. Visit the support section of our website [lgcstandards.com](http://lgcstandards.com) for a series of Dr. Ehrenstorfer Tech Tip videos and frequently asked questions.

Safety

Proper precautions should be observed while handling. See Safety Data Sheet.

Storage

The RM should be stored in the original sealed container at the indicated temperature.

Traceability

The balances used for gravimetric measurements are calibrated with weights traceable to the national standards (DKD). The calibration of

LGC Labor GmbH  
Bgm.-Schlosser-Straße 6A  
86199 Augsburg, Germany  
T | +49 821 906080  
F | +49 821 9060888  
E |  
dr.ehrenstorfer@lgcgroup.com

---