

## **Certificate of Analysis**

Characterisation methods are accredited according to



HCI

#### **Reference Material**

#### **Product name**

3-Methyladamantan-1-amine Hydrochloride (Desmethylmemantine Hydrochloride)

Product codeLot numberMM1045.08W1038541CAS numberAppearance33103-93-4white solid

Molecular weight Melting point (DSC)

201.74 319 °C

Molecular formula Long-term storage C<sub>11</sub>H<sub>19</sub>N HCl 2 to 8 °C, dark

\_ 10 0 0, 00...

Assay¹ "as is" **99.2 %**  Uncertainty<sup>2</sup> U **0.6** %

Intended Use: Use for identification and quantification. The assay is verified by a second testing method.

Date of shipment: **25 Oct 2019** 

Producer confirms that this reference material (RM) meets the specification detailed on this Certificate of Analysis for **one year** from the date of shipment, provided the substance is stored under the recommended conditions unopened in the original container.

Release by: Date of Release:	0	Due donate Dialogo
Dr. Sabine Schröder Luckenwalde, 17 Oct 2019	Jarol	Product Release

<sup>&</sup>lt;sup>1</sup> Calibration and verification were carried out using standards traceable to SI-units. The value is expressed on an "as is" basis.

Organisation certified to ISO 9001 | DQS 102448 and GMP (EXCiPACT $^{\text{TM}}$ ) Test methods used for characterisation are accredited to ISO/IEC 17025 | DAkkS D-PL-14176-01-00

Producer: LGC GmbH Louis-Pasteur-Str. 30 D-14943 Luckenwalde Germany www.lgcstandards.com Page 1/8

<sup>&</sup>lt;sup>2</sup> The uncertainty "U" is the expanded uncertainty of the testing method for the assigned value estimated in accordance with the Guide to the Expression of Uncertainty in Measurement (GUM). It corresponds to a level of confidence of about 95%. Coverage factor k = 2.



#### **Product information**


This RM is intended for laboratory use only and is not suitable for human or animal consumption.

This RM conforms to the characteristics of a primary standard as described in the ICH Guidelines. The values quoted in this Certificate of Analysis are the producer's best estimate of the true values within the stated uncertainties and based on the techniques described in this Certificate of Analysis. The characterisation of this material was undertaken in accordance with the requirements of ISO/IEC 17025. The identity is verified by data from international scientific literature.

#### Storage and handling

Before usage of the RM, it should be allowed to warm to room temperature. No drying is required, as assigned values are already corrected for the content of water and other volatile materials.

Reference Material quality is controlled by regularly performed quality control tests (retests).

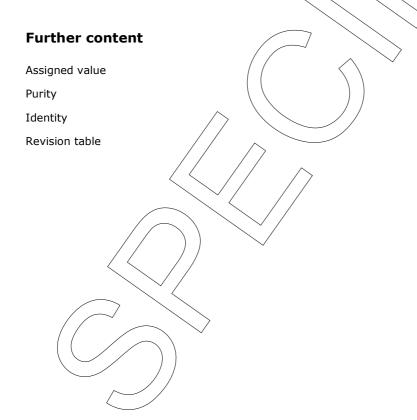



#### **Assigned value**

Assay "as is":

99.21 %; U = 0.55 %

The assay "as is" is assessed by carbon titration of elemental analysis and is equivalent to the assay based on the not-anhydrous and not-dried substance. The assay is verified by 100% method (mass balance). The verified result lies inside our acceptance criteria, i.e. less than 1.0 % difference to assay assigning technique.

For quantitative applications, use the assay as a calculation value on the as is basis. The uncertainty of the assay can be used for estimation/calculation of measurement uncertainty.

#### Method 1: Value assigning technique - carbon titration of elemental analysis

Method

percentage carbon found in relation to percentage carbon as calculated for molecular formula

**Result** (mass fraction, n = 3)

99.21 %; U ≥ 0.55 %

#### Method 2: Value verifying technique - 100% method

100% method (mass balance) with

chromatographic purity by HPLC

Result

99.53/%

The calculation of the 100% method follows the formula:

Assay (%) = (100 % - volatile contents (%))

Purity (%) 100 %

Volatile contents are considered as absolute contributions and purity is considered as relative contribution. Inorganic residues are excluded by additional tests.



### **Purity Purity by Gas Chromatography (GC) GC conditions:** HP-5MS, 30 m x 0.25 mm x 0.25 μm Column EI, 70 eV; 35 to 550 amu; 280 °C **Detector** Split 20:1, 220 % **Injector** Flow rate Helium 1.50 ml/min Initial Temp.: 70 °C for 3 min Heating Rate: 30 °C/min Final Temp.: 250 °C for 11 min/ Oven program x10 <sup>4</sup> 8.5-0.5-8 8.5 9 9.5 10 10.5 11 11.5 12 12.5 13 13.5 14 14.5 15 15.5 16 16.5 17 17.5 18 18.5 19 19.5 4 4.5 Time [min] Area percent report - sorted by signal Retention time Area Area % Pk# 6.33 1 67280.21 100.00 67280.21 **Totals** 100.00

The content of the analyte was determined as ratio of the peak area of the analyte and the cumulative areas of the purities, added up to 100 %. Air peaks were ignored in calculation.

Result (n = 3)	100.00 %; U = 0.18 %	



#### **Volatile content**

Water content		
Method	Karl Fischer titration	
Result (n = 3)	0.47 % <sup>*</sup> ; SD = 0.04 %	

<sup>\*</sup>not accredited testing method

Residual solvents		$\wedge$		$\checkmark$ $\langle$	/	//	
Method	<sup>1</sup> H-NMR		_				
Result (n = 1)	No significant amounts of resid	dual solv	ents	were	detect	ed (<	< 0.05 %).*

<sup>\*</sup>not accredited testing method

#### **Inorganic residues**

#### **Method:** Elementary analysis


Inorganic residues can be excluded by elementary analysis (CHN).






# **Identity** The identity is assessed by ISO/IEC 17025 accredited testing methods. Method Conditions Result <sup>1</sup>H-NMR 400 MHz, DMSO-d<sub>6</sub> Structure confirmed



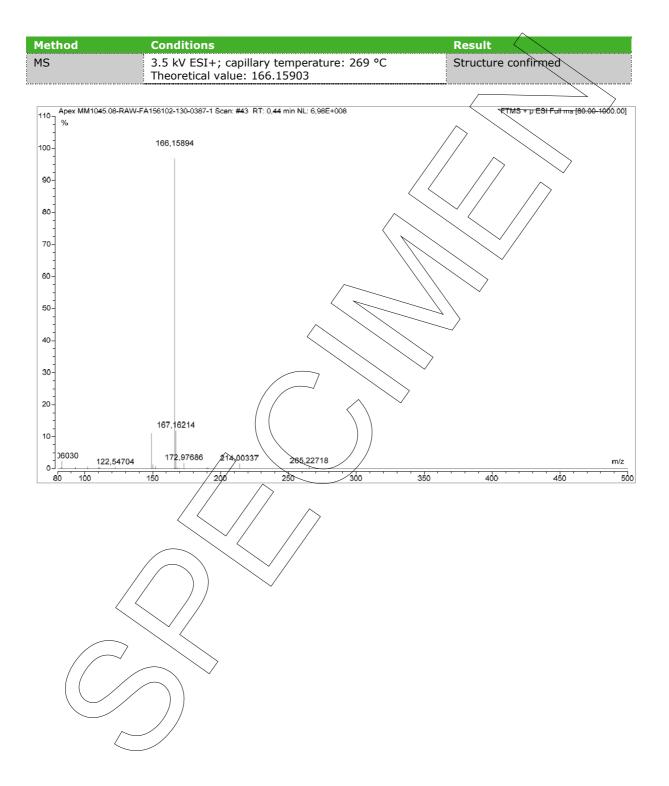



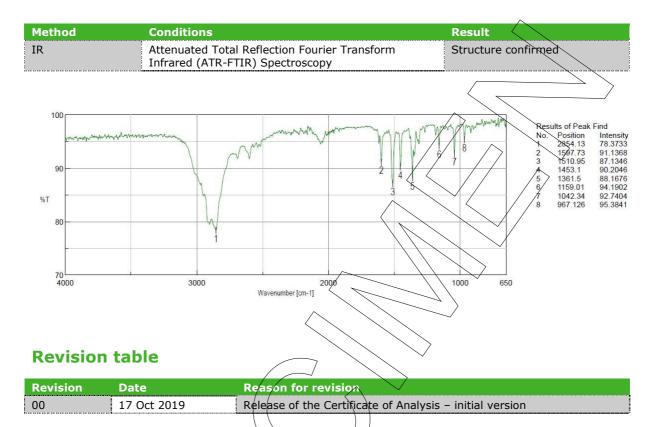

Product warranties for the RM are set out in the terms and conditions of purchase.