Certificate of Analysis

ISO Guide 34 Reference Material

Product Identification

Article Code: DRE-C10046000

Article Name: Adipic acid-bis-2-ethylhexyl ester

Formula: C22H42O4 Moi. Weight: 370.57 CAS No.: 103-23-1



Lot Number:

G149143

Expiry Date: **Storage Temperature:**

16.01.2024 20°C ± 4°C

Storage and handling: The RM should be stored in the original sealed bottle at the temperatur given above. After use the bottle should be tightly closed and protected from moisture and light. The excity date is valid for original sealed bottles under recommended storage conditions only.

Purity:

99.90% (g/g)

Expanded Uncertainty U=

0.30% (g/g)

The uncertainty of this standard is calculated in accordance with the ISO Guide 34 and EURACHEM/CITAC Guide - Quantifying Uncertainty in Analytical Measurement, Second Edition. The expanded uncertainty is U(exp) = u(RM) x k, where k is the coverage factor at the 95% confidence level (k=2). Uncertainty u(RM) is based on the combination of the uncertainties associated with each individual operation involved in the analysis of the product: $u(RM) = vu(char)^2 + u(bb)^2 + u(lts)^2 + u(sts)^2$; u(char) is the uncertainty of purity determination; u(bb) uncertainty of homogeneity test; u(lts) uncertainty of stability test long-term; u(sts) uncertainty of stability test short-term. u(its) and u(sts) are not included in the calculation as the stability statement is based on real evidence opposed to simulation. Minimum sample: 1 mg is recommended as the minimal sample amount. If less material is used, it is recommended to increase the certified uncertainty by a factor of two for half sample and a factor of four for a quarter of sample.

ntended use: Use this RM as calibrant for chromatography or any other analytical technique.

Analytical Data

Traceability of chromatography: To the International System of Units (SI).

instrument: Detection:

GC/FID FID

Optima-5MS, 0.25 µm, 0.25 mm

Column: Inj.-Voi.:

1.0 ml/min Ret.Time:

Injector: Initial Temp: Gradient:

320°C

120°C for 4 min 320°C for 3 min

15°C/min

Traceability: The balances used are calibrated with weights traceable to the national standards (DKD).

Calibrated class A glassware is used for volumetric measurements.

Water Content: <0.10% (g/g) by Karl-Fischer-Titration (U(exp) = 0.03% (g/g)).

Identity:

EA, NMR, RT, IR, MS

Certified by:

16.01.2018 N. Müller

The LGC Labor GmbH, accreditated by DAkkS as indicated by the accreditation number D-RM-19883-01 & D-PL-19883-01, has shown competence based on ISO Guide 34:2009 with relevant parts of DIN EN ISO/IEC 17025:2005 for production of certified reference materials in form of organic pure substances and in form of single and multi-component solutions of organic pure substances. Data file:

10046000-37.dx

Sample name:

71107AL G149143

lnj. volume [µl]:

1.0

Acq. method:

pahk.amx

Instrument:

FID 3

Sequence Name:

2017KW44-5a

Injection date:


11/4/2017 10:28:10 AM

Location:

25

Sample Description

Adipic acid-bis-2-ethylhexyl ester

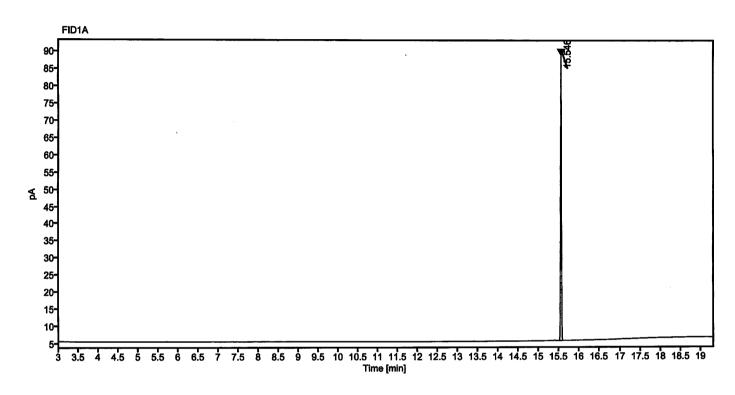

Signal:	FID1A				
Nr.	RT [min]	Area [pA*s]	Height [pA]	Area%	Width [min]
1	15.546	119.40424	83.31	100.00	0.101
	Sum	119.40			

LOD.