

REFERENCE MATERIAL CERTIFICATE

ISO 17034

Reference Material

This certificate is designed in accordance with ISO 17034 and ISO Guide 31. This reference material (RM) was designed, produced and verified in accordance with ISO/IEC 17025, ISO 17034 and a registered quality management system ISO 9001.

Product Name Sulfamerazine D4

Product Code DRE-C16995110

CAS No. 1020719-84-9


Mol. Weight 268.33

Mol. Formula C₁₁D₄H₈N₄O₂S G1552911 Format Neat **Expiry Date**

16 Apr 2031

Lot Number

Storage Temp 20°C ± 4°C



CERTIFIED Purity 94.37% (g/g)

CERTIFIED **Expanded Uncertainty (U)** 2.32% (q/q)

Uncertainty


The certified value(s) and uncertainty(ies) are determined in accordance with ISO 17034 with an 95% confidence level (k=2). Uncertainty is based on the Total Combined Uncertainty, including uncertainties of characterisation, homogeneity and stability testing. Stability values are based on real evidence opposed to simulation.

The producer certifies that this reference material meets the specification stated in this certificate until the expiry date, provided it is stored unopened at the recommended temperature herein. Product warranties for this reference material are set out in the terms and conditions of purchase.

CERTIFIED BY	CERTIFIED ON	5144	RM Release
I. Milusic	16 Apr 2025	J. Kilusic	

REFERENCE MATERIAL CERTIFICATE

ISO 17034

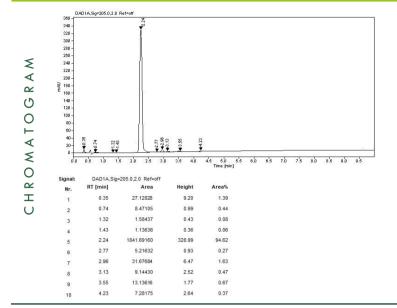

Instrument UHPLC/DAD

Column

LUNA Omega C18 $\,1.6~\mu m\,$ 100 x 2.1 mm

Method Details

Eluent A: 100)% Acetonitril	e
Eluent B: 100	0% Water	
Time [min]	Eluent A [%]	Eluent B [%]
0	10	90
0.3	10	90
8	98	2
9.5	98	2

Flow 0.5 mL/min

Method of Characterisation

Purity was determined by quantitative 1H-NMR

Method of Identification

EA, NMR, RT, IR, MS, UV

Batch Information

Water Content: 0.24% (g/g) by Karl-Fischer-Titration (U(exp) = 0.05% (g/g)). Chemical Purity: 96.50%, Expanded Uncertainty U = 1.64%; Isotopic Value: 97.80%, Expanded Uncertainty U = 1.64%No Isotopic Composition available.

Intended Use

This RM is intended for use in a laboratory as a calibration and quality control standard or in method development for analytical techniques.

Safety

Proper precautions should be observed while handling. See Safety Data Sheet.

Traceability

The balances used for gravimetric measurements are calibrated with weights traceable to the national standards (DKD). The calibration of

LGC Labor GmbH

Bgm.-Schlosser-Straße 6A 86199 Augsburg, Germany T | +49 821 906080 F | +49 821 9060888 E | dr.ehrenstorfer@lgcgroup.com the balances is verified daily internally and annually by an external accredited calibration service. Chromatographic methods are traceable to the International System of Units (SI).

Homogeneity

Random replicate samples of the final packaged RM have been analysed to prove homogeneity compliant with ISO 17034.

Storage

The RM should be stored in the original sealed container at the indicated temperature.

LGC Labor GmbH is accredited by DAkkS as reference material producer on ISO 17034 (D-RM-19883-01-00).

All characterisation measurements at LGC Labor GmbH are accredited methods to ISO/IEC 17025.

Instructions for use

It is recommended to use 1 mg as the minimum sample size and if less material is used, to increase the certified uncertainty by a factor of two for half sample and four for a quarter of sample. If storage after opening is necessary, the RM should be tightly closed and kept from light and moisture. If the RM was in a sealed ampoule, it should be transferred to a vial with minimum head space. Visit the support section of our website lgcstandards.com for a series of Dr. Ehrenstorfer Tech Tip videos and frequently asked questions.

