

# **Certificate of Analysis**

#### ISO 17025 Characterisation methods are accredited according to **Reference Material** Product name 17-Hydroxy-19-nor-17a-pregna-4,6-dien-20-yn-3one (6,7-Didehydronorethisterone) ΟН Product code Lot number MM0218.04 W1017679 Ĥ Ĥ **CAS** number Appearance 31528-46-8 off-white solid Molecular weight **Melting point** 296 40 244 °C **Molecular formula** Long-term storage $C_{20}H_{24}O_2$ 2 to 8 °C, dark Assay<sup>1</sup> "as is' Uncertainty<sup>2</sup> U 99.9 % 0.3 % Intended Use: Use for identification and quantification. The assay is verified by a second testing method. 06 Apr 2020 Date of shipment:

Producer confirms that this reference material (RM) meets the specification detailed on this Certificate of Analysis for **two years** from the date of shipment, provided the substance is stored under the recommended conditions unopened in the original container.

Release by:	Date of Release:	P	Draduat Dalaasa
Dr. Sabine Schröder	Luckenwalde, 24 Mar 2020	Jane	Product Release

<sup>1</sup> Calibration and verification were carried out using standards traceable to SI-units. The value is expressed on an "as is" basis.

<sup>2</sup> The uncertainty "U" is the expanded uncertainty of the testing method for the assigned value estimated in accordance with the Guide to the Expression of Uncertainty in Measurement (GUM). It corresponds to a level of confidence of about 95%. Coverage factor k =2.

Organisation certified to ISO 9001 | DQS 102448 and GMP (EXCiPACT<sup>TM</sup>) Test methods used for characterisation are accredited to ISO/IEC 17025 | DAkkS D-PL-14176-01-00

Producer: LGC GmbH Louis-Pasteur-Str. 30 D-14943 Luckenwalde Germany www.lgcstandards.com Page 1/8



### **Product information**

This RM is intended for laboratory use only and is not suitable for human or animal consumption. This RM conforms to the characteristics of a primary standard as described in the ICH Guidelines. The values quoted in this Certificate of Analysis are the producer's best estimate of the true values within the stated uncertainties and based on the techniques described in this Certificate of Analysis. The characterisation of this material was undertaken in accordance with the requirements of ISO/IEC 17025. The identity is verified by data from international scientific literature.

### Storage and handling

Before usage of the RM, it should be allowed to warm to room temperature. No drying is required, as assigned values are already corrected for the content of water and other valatile materials.

Reference Material quality is controlled by regularly performed quality control tests (retests).

### **Further content**

Assigned value

Purity

Identity

Revision table



### **Assigned value**

Assay "as is":

99.91 %; U = 0.30 %

The assay "as is" is assessed by carbon titration of elemental analysis and is equivalent to the assay based on the not-anhydrous and not-dried substance. The assay is verified by 100% method (mass balance). The verified result lies inside our acceptance criteria, i.e. less than 1.0 % difference to assay assigning technique.

For quantitative applications, use the assay as a calculation value on the as is basis. The uncertainty of the assay can be used for estimation/calculation of measurement uncertainty.

Method 1: Value assigning technique - carbon	titration of elemental analysis
Method	percentage carbon found in relation to percentage
Result (mass fraction, n = 3)	99.91%, U = 0.30%

Method 2: Value verifying technique - 100% method		
100% method (mass balance) with chromatographic purity by HPLC		
Result	99,26 %	
$\sim$		

The calculation of the 100% method follows the formula:

Purity (%) Assay (%) = (100 % - volatile contents (%)) 100 %

Volatile contents are considered as absolute contributions and purity is considered as relative contribution. Inorganic residues are excluded by additional tests.




### **Purity**

### Purity by High Performance Liquid Chromatography (HPLC)

·				
HPLC conditions:				
Column	LiChrospher 60 RP-select B; 5 µm, 125 x 4 mm			
Column temperature	40 °C			
Detector	DAD, 245 nm			
Injector	Auto 5 µl; 0,023 mg/ml in Acetonitrile			
Flow rate	1.0 ml/mip			
Phase A	Water, 0.1 % H₃PO₄			
Phase B	Acetonitrile, 0.1 % H <sub>3</sub> PO <sub>4</sub>			
Gradient program	0-20 min A/B 60/40 (v/v)			
	· · · · · · · · · · · · · · · · · · ·			

HPLC chromatogram and peak table

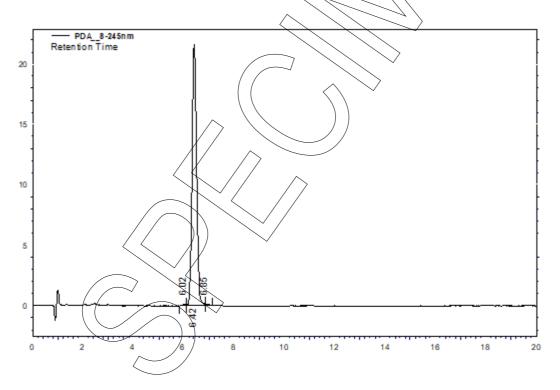



Area percent report - sorted by signal				
Pk #	Retention time	Area	Area %	
1	6.02	759	0.29	
2	6.42	256278	99.24	
3	6.85	1193	0.46	$\rightarrow$
Totals		258230	100.00	

The content of the analyte was determined as ratio of the peak area of the analyte and the cumulative areas of the purities, added up to 100 %. System peaks were ignored in calculation.

Result (n = 6)

99.26 %; U = 0.31 %

### Volatile content

Water content		(	$\land$		$\rightarrow$
Method	Karl Fist	;he	er titration		
<b>Result</b> (n = 3)			ant amounts of I	esi	sidual solvents were detected (< 0.05 %). <sup>*</sup>

\*not accredited testing method


Residual solvents	
Method /	++-NMR
<b>Result</b> (n = 1)	No significant amounts of residual solvents were detected (< 0.05 %).*
*not accredited testing method	
Method: Elementary analysis	

Inorganic residues can be excluded by elementary analysis (CHN).




## Identity

The identity is assessed by ISO/IEC 17025 accredited testing methods.

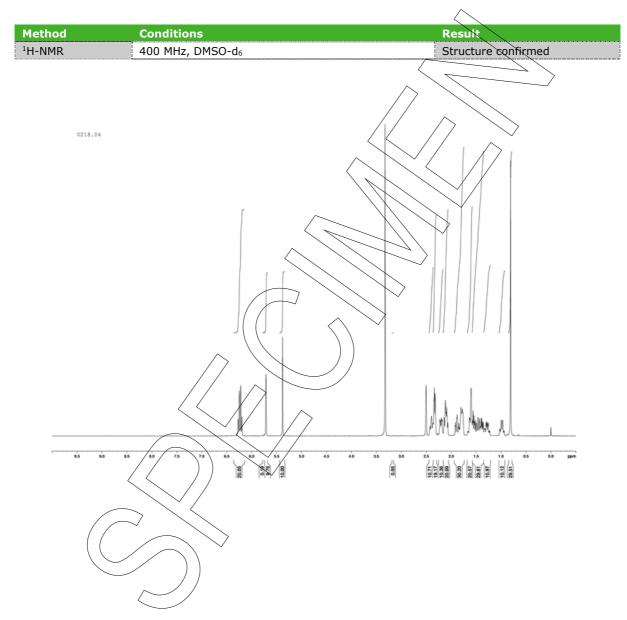



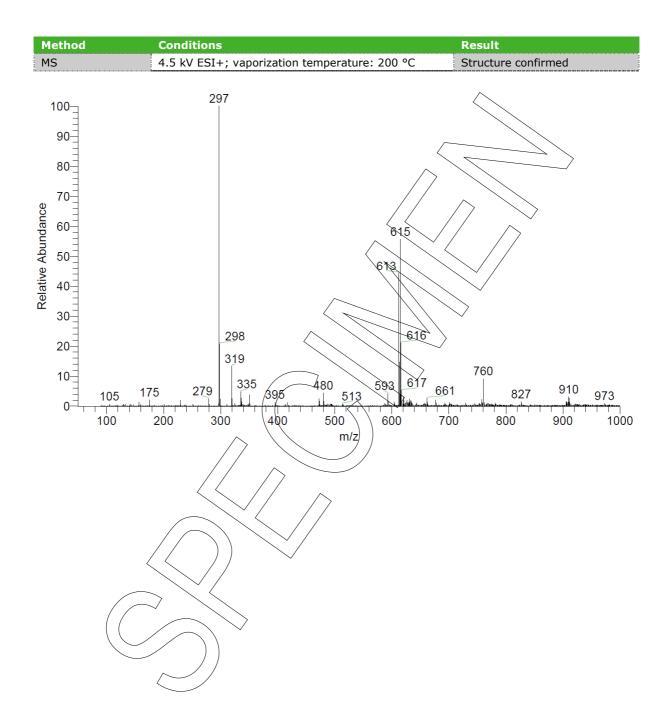



Method Result Conditions IR Structure confirmed Attenuated Total Reflection Fourier Transform Infrared (ATR-FTIR) Spectroscopy 100 
 Result of Peak Picking

 No.
 Position
 Intensity

 2
 3245.03
 80.8232

 3
 2938.98
 81.5784

 4
 2857.99
 85.5123

 4
 2857.99
 80.232

</tabular 90 1638.23 1372.1 58.3032 76.9508 5 6 80 1270.86 73.9331 %Т 75.4885 70.1619 75.355 69.7708 1205.29 1057.76 8 9 70 10 11 897.701 697.141 60 50 4000 1800 1700 1600 1500 1400 1300 1200 1100 1000 900 800 3600 3400 3200 3000 2800 2600 2400 2200 2000 650 Wavenumber [cm-1] **Revision table** Revision Date **Reason for revision** 24 Mar 2020 00 Release of the Certificate of Analysis - initial version Product warranties for the RM are set out in the terms and conditions of purchase.