

Certificate of Analysis

Reference Material - Primary Standard

Product Name: rac-MDEA-D₅ (rac-3,4-Methylenedioxy-N-ethylamphetamine-D₅)

0.1 mg/ml in Methanol

Catalogue Number: LGCAMP1364.07-02

Lot Number: 51014

CAS Number: 160227-43-0 Molecular Formula: $C_{12}H_{12}D_5NO_2$

Molecular Weight: 212.30 Solvent: Methanol

Volume per Ampoule: Not less than 1 ml

Long-term Storage: 2 to 8 °C, dark

Expiry Date: July-2016

Intended Use: The primary aim of this material is for identification, calibration and quantification.

Component	Concentration ("as is")	Uncertainty
see product name	0.1001 mg/ml ⁻²	$U = 0.0007 \text{ mg/ml}^{-3}$

Uncertainty of the concentration is expressed as an expanded uncertainty in accordance with ISO 17025 and Guide 34 at the about 95 % level of confidence using a coverage factor of k = 2 and has been calculated by statistical analysis of our production system and incorporates uncertainty of the purity, material density and balance and weighing technique. Concentration based on material weighings and material purity factor (assay of the neat material).

The solution's concentration and homogeneity are verified by independent method.

LGC certifies that this standard meets the specification stated in this certificate and warrants this product to meet the stated acceptance criteria through the retest date when stored unopened as recommended. Product should be used shortly after opening to avoid concentration changes due to evaporation. Warranty does not apply to ampoules stored after opening.

Release Date:

Luckenwalde, September 2014

Signed:

9 pages

Dr. Sabine Schröder

Unit for Reference Materials

LGC Quality - ISO Guide 34:2009 | ISO/IEC 17025:2005 | ISO 9001:2008 | DAkkS D-PL-14176-01-00 | DQS 102448 QM08



¹ Ampoules are overfilled to ensure a minimum 1 ml volume fill. We advise laboratories to use measured volumes of this standard solution before diluting to the desired concentration.

² The value is based on the results of analytical techniques, which calibration and verification was carried out with standards traceable to SI-units. The value is expressed on an "as is" basis.

The concentration with its uncertainty is valid in the range between 19 °C and 25 °C.

The identity is verified by data from international scientific literature.

Gravimetrically prepared using qualified balances calibrated annually by accredited calibration service. Calibration verification performed daily prior to use utilizing weights traceable to SI via other mass standards.

The uncertainty "U" is the expanded uncertainty estimated in accordance with the Guide to the Expression of Uncertainty in Measurement (GUM). It is corresponding to a level of confidence of about 95 %. Standard uncertainties are indicated with "u".



Verification of Concentration and Homogeneity				
Lot Number	Verified Concentration (mg/ml)	% RSD - Homogeneity		
	Result Acceptance Criteria	Result Acceptance Criteria		
51014	0.1012 ± 3 %	1.173 ≤ 3 %		
Concentration verified by HPLC				

External Calibration (100 % amount) Solution Standard Assay Parameters Analysis Method **HPLC** Column: Hypersil Gold (C18), 5 μm, 150 x 4.6 mm Number of Measurements: 6 Injector: Auto; 3 µl; 0.1001 mg/ml in Methanol Flow: 1.0 ml/min, 40 °C Detector: 205 nm Conditions: mob. Phase A: Water + 0.1 % H₃PO₄, mob. Phase B: Acetonitrile + 0.1 % H₃PO₄ 0-9 min A/B 90/10, 9-12 min A/B to 40/60, 12-14 min A/B to 90/10, 14-21 min A/B 90/10 (v/v)

Neat Material Data				
Product Name:	rac-MDEA-D ₅ (rac-3,4-Methylenedioxy-N-ethylamphetamine-D ₅)			
CAS Number:	160227-43-0			
Molecular Formula:	$C_{12}H_{12}D_5NO_2$			
Molecular Weight:	212.30			
Compound Lot:	51013			
Test		Method	Result	
¹ H-NMR Spectrum*		SOP 06-053	conform / complies to structure	
IR Spectrum*		SOP 06-036	conform / complies to structure	
Mass Spectrum (ESI)	*	SOP 06-022	conform / complies to structure	
Isotopic Purity by HRN	MS		0.15 % D ₃ , 4.61 % D ₄ , 95.24 % D ₅	
Assay by quantitativ	e NMR (as is)*	Quant. NMR	98.68 %	
The expanded uncertainty according to the assay is $U = 0.43\%$ (about 95% level of confidence using a coverage factor of $k = 2$).				

^{*:} Validated method performed by ISO/IEC 17025 accredited testing lab. Purity factor does not include adjustment for chiral and/or isotopic purity.

The assay of the neat material is verified by the 100 % method using HPLC, corrected with water (KFT) and residual solvents.






I. Identity

The identity of the reference substance (neat material) was established by the following analyses.

la. ¹H-NMR Spectrum

Conditions: 400 MHz, CDCl₃

The structure is confirmed with the signals of the spectrum and their interpretation.

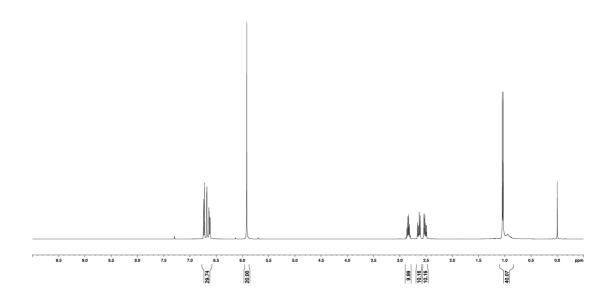






lb. Mass Spectrum

Method: 4.5 kV ESI; vaporization temperature: 200 °C, direct inlet

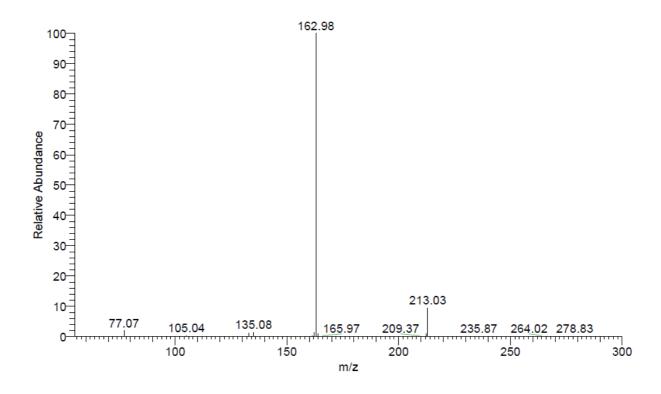

m/z	fragments	
213.03	[MH]	
162.98	[C ₁₀ H ₁₁ O ₂]	


The signals of the mass spectrum and their interpretation are consistent with the structural formula.





lc. **IR Spectrum**

Method: attenuated total reflection fourier transform infrared (ATR-FTIR) spectroscopy

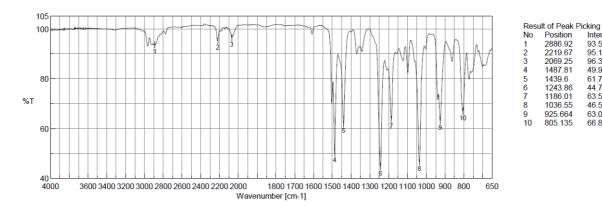


2886.92 2219.67 93.5572 95.1618 96.333 2069.25 49.9606 61.7929 44.711 1487.81 1439.6 1243.86 1186.01 1036.55 925.664 805.135 63 0074

The signals of the IR spectrum and their interpretation are consistent with the structural formula.

ld. **UV Spectrum**

Method: HPLC (DAD-detection)

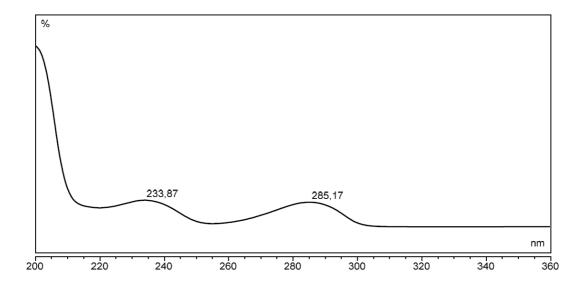






II. Assay by quantitative NMR spectroscopy

The assay of the reference substance was established by quantitative NMR spectroscopy using DMSO- d_6 as the solvent and with Dimethyl terephthalate (certified reference material, signal 7.75 - 8.40 ppm, 4 H) as internal standard.

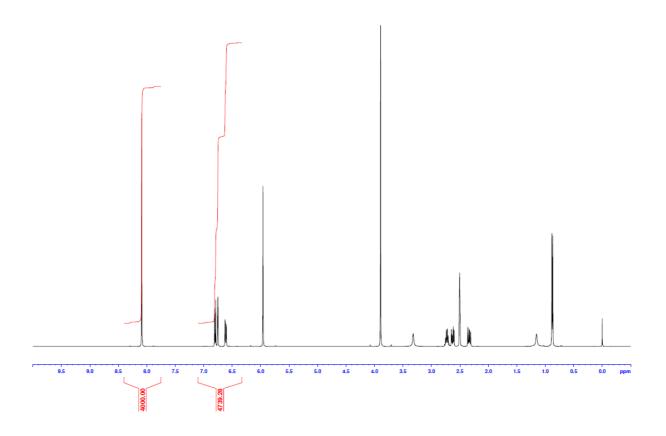

Results:






Ш. **Purity**

Illa. **High Performance Liquid Chromatography (HPLC)**

The purity of the reference substance (neat material) was analysed by high performance liquid chromatography (HPLC).

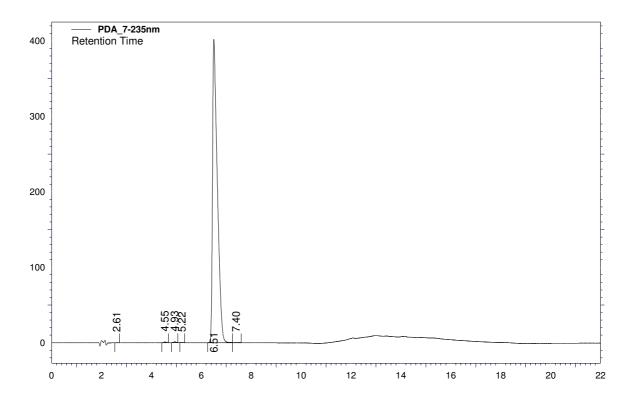

Area Percent Report - Sorted by Signal

Pk#	Retention Time	Area	Area %	
1	2.61	815	0.02	
2	4.55	7014	0.13	
3	4.93	7686	0.14	
4	5.22	557	0.01	
5	6.51	5381868	99.65	
6	7.40	2716	0.05	
Totals		5400656	100.00	

For the calculation the system peaks were ignored. The content of the analyte was determined as ratio of the peak area of the analyte and the cumulative areas of the purities, added up to 100 %.





Methanol

HPLC Conditions:

Column:Conditions:Detector:Injector:Hypersil Gold (C18)1.0 ml/min, 40 °CDADAuto

 $5 \mu m$, $150 \times 4.6 \text{ mm}$ 0 - 7 min Water/Acetonitrile 89/11 235 nm $1 \mu l$; 1.084 mg/ml in

10 – 12 min Water/Acetonitrile 50/50 12 – 15 min Water/Acetonitrile to 89/11 15 – 22 min Water/Acetonitrile 89/11 (v/v);

7 - 10 min Water/Acetonitrile to 50/50

0.1 % H₃PO₄

Results:

Arithmetic mean (n=3) 99.65 %

IIIb. Water Content

Method: coulometric Karl Fischer titration

Results:

Arithmetic mean (n=3) 0.10 % (mass fraction)

IIIc. Residual Solvents

Method: 1H-NMR

No significant amounts of residual solvents were detected (< 0.05 %).

IV. Stability and Homogeneity

Accelerated stability studies indicate no significant instability. The given validity period is based on this data. This is backed up by historical data over the range of several years for the neat substance. Homogeneity assured by validated process of preparation (incl. ampoulation), verified by homogeneity testing (HPLC).





V. Further Information

General

For laboratory use only. Not suitable for human or animal consumption.

This material conforms to the characteristics of a primary standard as described within ISO Guide 30 (Terms and definitions used in connection with reference materials).

The certified values quoted in this certificate are LGC's best estimate of the true values within the stated uncertainties and based on the techniques described in this certificate.

Handling of the RM

Before usage of the RM, it should be allowed to warm to room temperature. The concentration with its uncertainty is guaranteed in the range between 19 °C and 25 °C. The uncertainty accounts for the temperature-dependent density in this range.

Quality Control Assessment

The product quality is controlled by regularly performed quality control tests (retests).

