Certificate of Analysis ISO Guide 34 Reference Material



Product Identification

Article Code: DRE-C10162100

Article Name: Amidosulfuron D6 (dimethoxy D6)

C9H9N5O7S2D6 Formula:

Mol. Weight: 375.40

CAS No.:

Lot Number:

G156821

Expiry Date:

16.03.2022

Storage Temperature:

20°C ± 4°C

Storage and handling: The RM should be stored in the original sealed bottle at the temperatur given above. After use the bottle should be tightly closed and protected from moisture and light. The expiry date is valid for original sealed bottles under recommended storage conditions only.

Combined Purity:

97.49% (g/g)

Isotopic Purity:

99.99% (g/g)

Chemical Purity:

97.50% (g/g)

Expanded Uncertainty U= 0.72% (g/g)

Expanded Uncertainty U=

0.30% (g/g)

Expanded Uncertainty U≃

0.65% (g/g)

The uncertainty of this standard is calculated in accordance with the ISO Guide 34 and EURACHEM/CITAC Guide - Quantifying Uncertainty in Analytical Measurement, Second Edition. The expanded uncertainty is U(exp) = u(RM) x k, where k is the coverage factor at the 95% confidence level (k=2). Uncertainty u(RM) is based on the combination of the uncertainties associated with each individual operation involved in the analysis of the product: u(RM) = vu(char)² + u(bb)² + u(lts)² + u(sts)²; u(char) is the uncertainty of purity determination; u(bb) uncertainty of homogeneity test; u(lts) uncertainty of stability test long-term; u(sts) uncertainty of stability test short-term. u(lts) and u(sts) are not included in the calculation as the stability statement is based on real evidence opposed to

Minimum sample: 1 mg is recommended as the minimal sample amount. If less material is used, it is recommended to increase the certified uncertainty by a factor of two for half sample and a factor of four for a quarter of sample.

Method Details

Acetonitrile:Water+0.5% H3PO4 2:1

Intended use: Use this RM as calibrant for chromatography or any other analytical technique.

Analytical Data

Traceability of chromatography: To the International System of Units (SI).

Instrument: Detection:

HPLC/DAD

DAD

ReproSil 100 C18 5 µm 250 x 3 mm Inj.-Vol.:

Flow:

10 μl 1.0 ml/min

Ret.Time: 1.73 min

Traceability: The balances used are calibrated with weights traceable to the national standards (DKD).

Calibrated class A glassware is used for volumetric measurements.

Water Content: <0.10% (g/g) by Karl-Fischer-Titration (U(exp) = 0.03% (g/g)).

Identity: EA, NMR, RT, IR, UV, MS

Certificate Revision 1 - 16.03.2018 - N. Müller

Certified on: Certified by: 16.03.2018 N. Müller

The LGC Labor GmbH, accreditated by DAkkS as Indicated by the accreditation number D-RM-19883-01 & D-PL-19883-01, has shown competence based on ISO Guide 34:2009 with relevant parts of DIN EN ISO/IEC 17025:2005 for production of certified reference materials in form of organic pure substances and in form of single and multi-component solutions of organic pure substances.

Data file:

10162100-03.dx

Sample name:

80109AL G156821

Inj. volume [µl]:

10.0

Acq. method:

21PK.amx

Instrument:

DAD4

Sequence Name:

09012018-Instabil

Injection date:


1/9/2018 8:37:44 AM

Location:

42

Sample Description

Amidosulfuron D6 (dimethoxy D6)

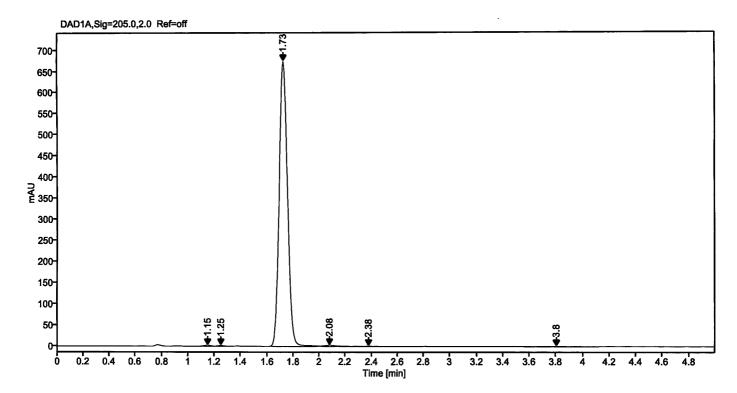

Signal:	DAD1A,Sig=205.0,2.0 Ref=off			
Nr.	RT [min]	Area	Height	Area%
1	1.15	9.92263	2.44	0.33
2	1.25	6.40779	1.78	0.21
3	1.73	2965.20125	673.74	98.41
4	2.08	21.97025	2.68	0.73
5	2.38	4.58523	0.67	0.15
6	3.80	5.06296	0.69	0.17
	Sum	3013.15		