




# Certificate of Analysis

ISO 9001

## Reference Material

### Product name

N,N,N-Trimethyl-2-[5-(1H-1,2,4-triazol-1-ylmethyl)-1H-indol-3-yl]ethanaminium Chloride

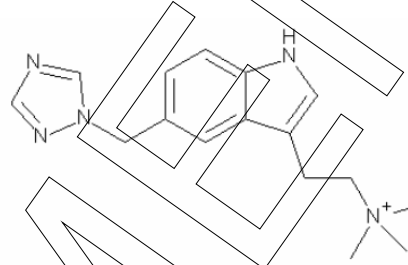

### Product code

MM1313.13

### Lot number

1012349

### CAS number

not listed

### Appearance

white solid

### Molecular weight

319.83

### Melting point

253 °C (dec)

### Molecular formula

C<sub>16</sub>H<sub>22</sub>N<sub>5</sub> Cl

### Long-term storage

2 to 8 °C, dark  
hygroscopic

Assay "as is"  
96.8 %

Date of shipment:

**02 Sep 2019**

Producer confirms that this reference material (RM) meets the specification detailed on this Certificate of Analysis for **one year** from the date of shipment, provided the substance is stored under the recommended conditions unopened in the original container.

<b>Release by:</b>	<b>Date of Release:</b>		Product Release
Dr. Sabine Schröder	Luckenwalde, 06 Aug 2019		



Mikromol™

## Product information

For laboratory use only. Not suitable for human or animal consumption.

Before usage of the RM, it should be allowed to warm to room temperature. No drying required, as the certified value is already corrected for the content of water and other volatile materials.

The product quality is controlled by regularly performed quality control tests (retests).

## Further content

Identity

Assay

Final result

Revision table


SPECIMEN



## Identity

The identity of the reference material was established by following analyses.


Method	Conditions	Result
<sup>1</sup> H-NMR	400 MHz, DMSO-d <sub>6</sub>	Structure confirmed

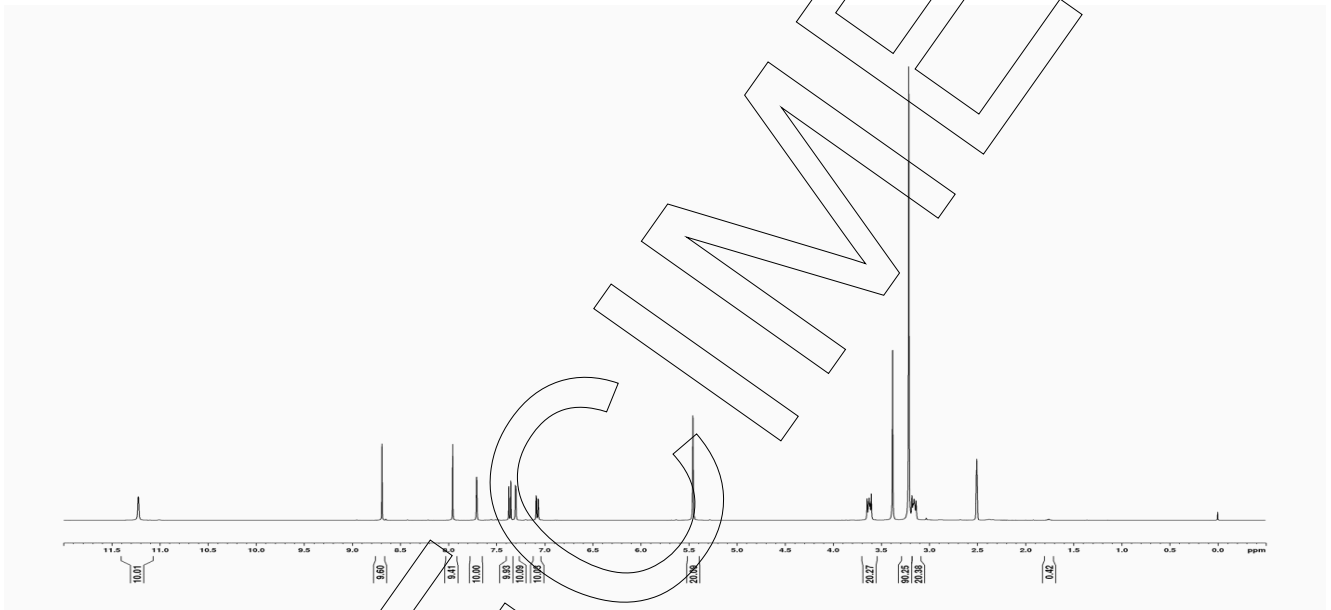

SAMPLE




Method	Conditions	Result
MS	3.5 kV ESI+; capillary temperature: 269 °C Theoretical value: 284.18697	Structure confirmed

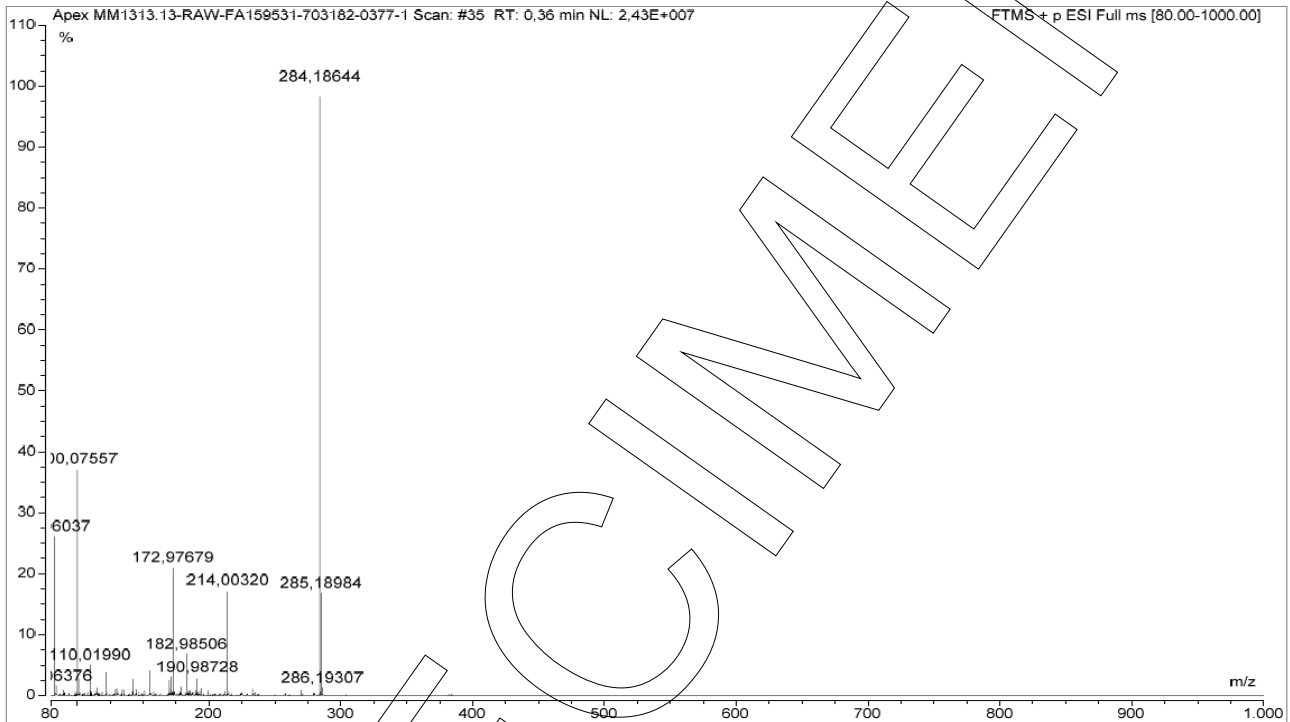

SPLEEN



Method	Conditions	Result
IR	Attenuated Total Reflection Fourier Transform Infrared (ATR-FTIR) Spectroscopy	Structure confirmed

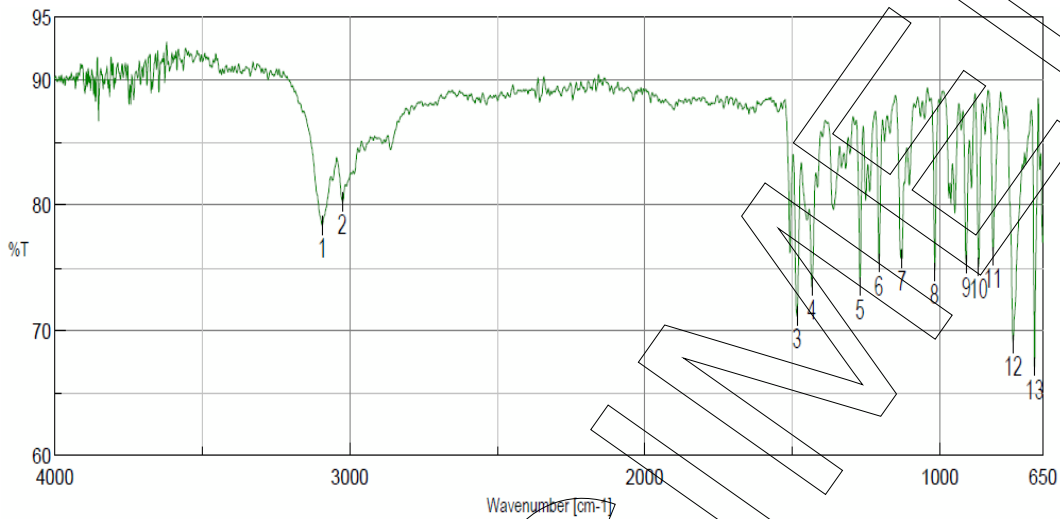

No.	Position	Intensity
1	3093.26	78.3524
2	3024.8	80.2324
3	1483.96	71.1297
4	1432.85	73.4646
5	1269.9	73.4815
6	1206.26	75.3592
7	1128.15	75.727
8	1017.27	74.6648
9	910.236	75.2403
10	867.81	75.0775
11	818.634	75.9067
12	751.138	68.8994
13	677.856	67.0589

## Assay


The assay of the reference material was assessed by following analyses.

### Purity by High Performance Liquid Chromatography (HPLC)

HPLC Conditions:	
Column	SymmetryShield RP18; 5 µm, 150 x 3.9 mm
Column temperature	40 °C
Detector	DAD, 225 nm
Injector	Auto 1 µl; 0.144 mg/ml in Acetonitrile/Water 50/50 (v/v)
Flow rate	1.0 ml/min
Phase A	Water, 0.1 % H <sub>3</sub> PO <sub>4</sub>
Phase B	Acetonitrile, 0.1 % H <sub>3</sub> PO <sub>4</sub>
Gradient program	0-8 min A/B 86/14 8-12 min A/B to 30/70 12-17 min A/B 30/70 17-21 min A/B to 86/14 21-32 min A/B 86/14 (v/v)



## HPLC chromatogram and peak table

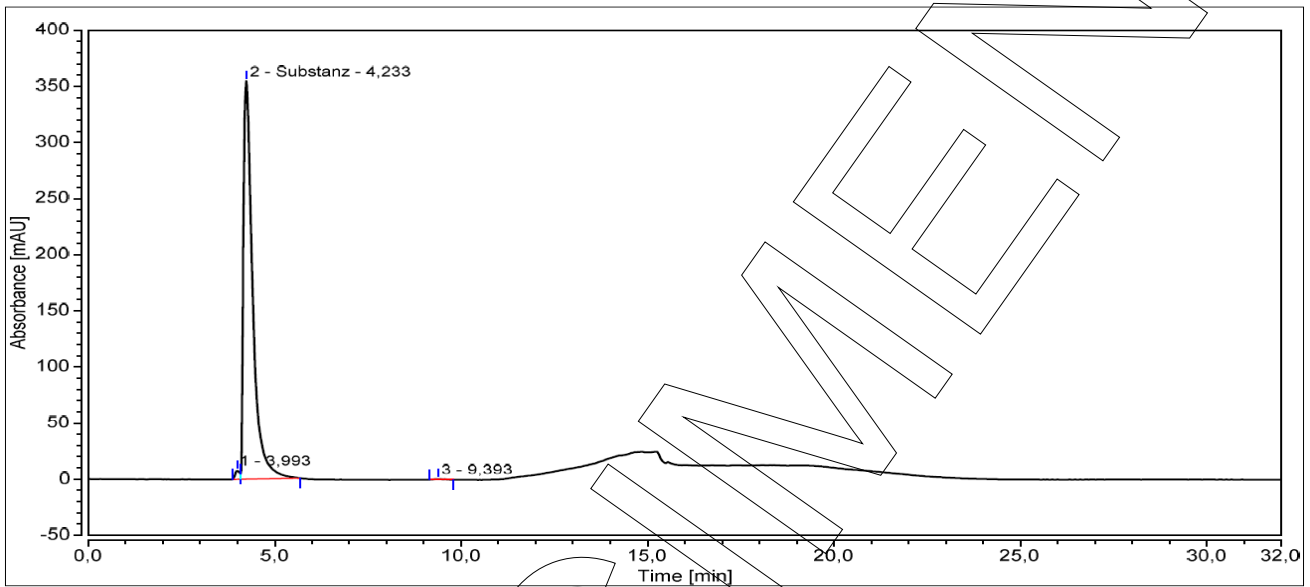

### Area percent report - sorted by signal

Pk #	Retention time	Area	Area %
1	3.993	1.120	1.08
2	4.233	102.309	98.74
3	9.393	0.188	0.18
<b>Totals</b>		<b>103.617</b>	<b>100.00</b>

The content of the analyte was determined as ratio of the peak area of the analyte and the cumulative areas of the purities, added up to 100 %. System peaks were ignored in calculation.

**Result (n = 3)**

98.74 %; SD = 0.01 %



## Volatile content

### Water content

<b>Method</b>	Karl Fischer titration
<b>Result</b> (n = 3)	1.74 %; SD = 0.08 %

### Residual solvents

<b>Method</b>	<sup>1</sup> H-NMR
<b>Result</b> (n = 1)	Sum: 0.24 % 0.24 % Tetrahydrofuran

## Final result

**Assay "as is": 96.78 %**

The assay "as is" is assessed by 100% method (mass balance) and is equivalent to the assay based on the not anhydrous and not dried substance respectively.

The calculation of the 100% method follows the formula:

$$\text{Assay (\%)} = (100 \% - \text{volatile contents (\%)}) * \frac{\text{Purity (\%)}}{100 \%}$$

Volatile contents are considered as absolute contributions and purity is considered as relative contribution. Inorganic residues are excluded by additional tests.

## Revision table

Revision	Date	Reason for revision
00	06 Aug 2019	Release of the Certificate of Analysis - initial version

Product warranties for the RM are set out in the terms and conditions of purchase.